


Towards a brighter future for  
all

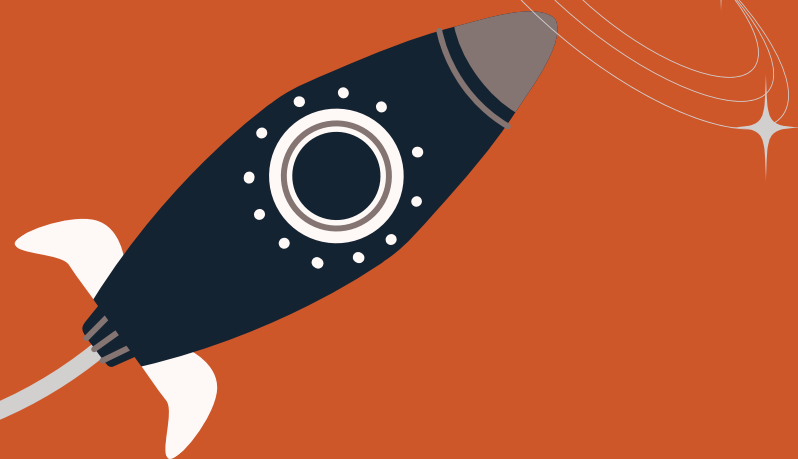

## Contact Us

[ctsales@centerm.com](mailto:ctsales@centerm.com)

[www.centermclient.com](http://www.centermclient.com)

Follow us



Centerm<sup>TM</sup> Luna Series

Alibaba Workspaces Thin Client **F320**



## Elevate Your Business to New Heights with Centerm F320

Centerm Cloud Terminal F320 redefines the cloud terminal experience with its powerful ARM architecture and enhanced security features. Powered by a high-performance ARM quad core 1.8GHz processor, the F320 delivers exceptional processing power and efficiency, making it ideal for demanding business applications.



## Centerm Luna F320 Features

- **Save on Upfront Costs**

Affordable devices that are easy on your wallet.  
Reduce your total cost of ownership ( TCO).

- **Seamless Alibaba Integration**

Designed for a smooth virtual desktop experience  
with Alibaba Elastic Desktop Service (EDS).

- **Effortless Deployment**


Pre-configured for fast and easy setup,  
minimizing downtime.

- **Enhanced Security**

Benefit from cloud-based data processing  
and storage,minimizing security risks.

- **Work Smarter, Work Efficient**

Powerful Processor, Fast Memory & Storage,  
Dual Monitors, No fans, no distractions.  
Lower your energy costs and environmental  
impact with low power consumption

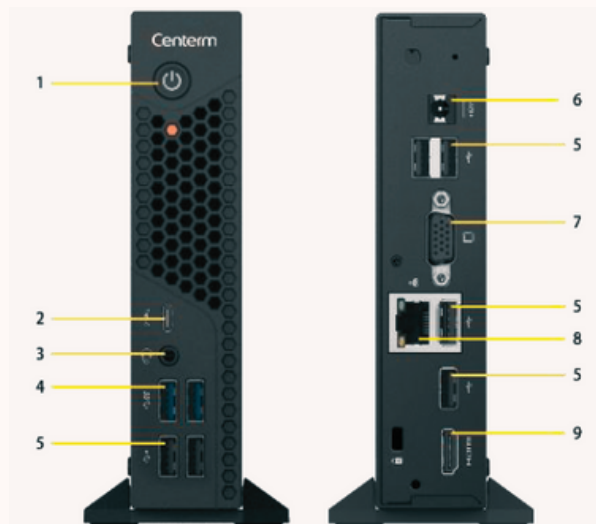

1. Power button
2. USB 2.0 Type-C port
3. Headphone/Microphone port
4. USB 3.0 port
5. USB 2.0 port
6. DC 12V input port
7. VGA port
8. RJ-45 network port
9. HDMI port

## SPECIFICATIONS

Processor	ARM Quad Core 2.0GHz
Available Operating System	COS <sup>1</sup>
Protocols	Xred
RAM (DDR4)	2GB
Storage (eMMC)	32GB
Display	HDMI x 1, VGA x 1
Resolution	HDMI:1920 * 1080@60Hz, VGA:1920 * 1080@60Hz
LAN	Gigabit RJ-45 network port x 1
USB 2.0 Type-C	x 1
USB 2.0	x 6
USB 3.0	x 2
Audio	1 x Headphone/Microphone port (2-in-1)
Dimension	134.9mm x 36.2mm x 157mm(stand excluded)/ 130mm x 65mm x 162.3mm (stand included)
Adapter	Worldwide auto-sensing 100-240V AC, 50/60 Hz, 12V/2A DC
Power Consumption	< 24w
Mountings	Vertical feet, standard
Cooling	Fan-less Convection
Operation Temperature	0°C to 40°C
Relative Humidity	30% to 90% non-condensing

